



## Professional

[Discharge MH](#) [LED MH](#) [Static Wash](#) [Special Effect](#) [Controller](#) [Fog Machine](#) [Laser FC/ACC](#) [Flood light](#) [Media server](#) [LED Screen](#) [Discontinued](#)

### • **XP-16R BEAM**

#### **Specifications**

Light Source:16R bulb

Beam Angle:1°

Color Temperature:8000K

#### **Control**

DMX Channel:19/21 Channel

Control Modes:DMX, Wireless control(Optional)

Firmware Upgrade:Update via DMX link

#### **Pan/Tilt**

Pan/Tilt: 540° /270°

Pan/Tilt Resolution: 16bit

Fixation: Pan/Tilt lock

#### **Construction**

Display:LCD display

Battery back-up for DMX addressing and other functions setting

Date In/Out socket:3-pin & 5-pin XLR sockets

Protection Rating:IP20

### **Features**

Motorized Focus

Color wheel:12 fixed colors plus white with rainbow effect

Gobo wheel:1 Rotating gobo wheel with 12 gobos plus open

Gobos outside diameter:9.8mm

Gobos image diameter:7mm

Smooth 0~100% dimming


Three sets of prisms- 2 x 8 facet prisms,1 x 6 facet linear prism

rotating in both directions

Variable shutter speed

[Learn Parameters](#)



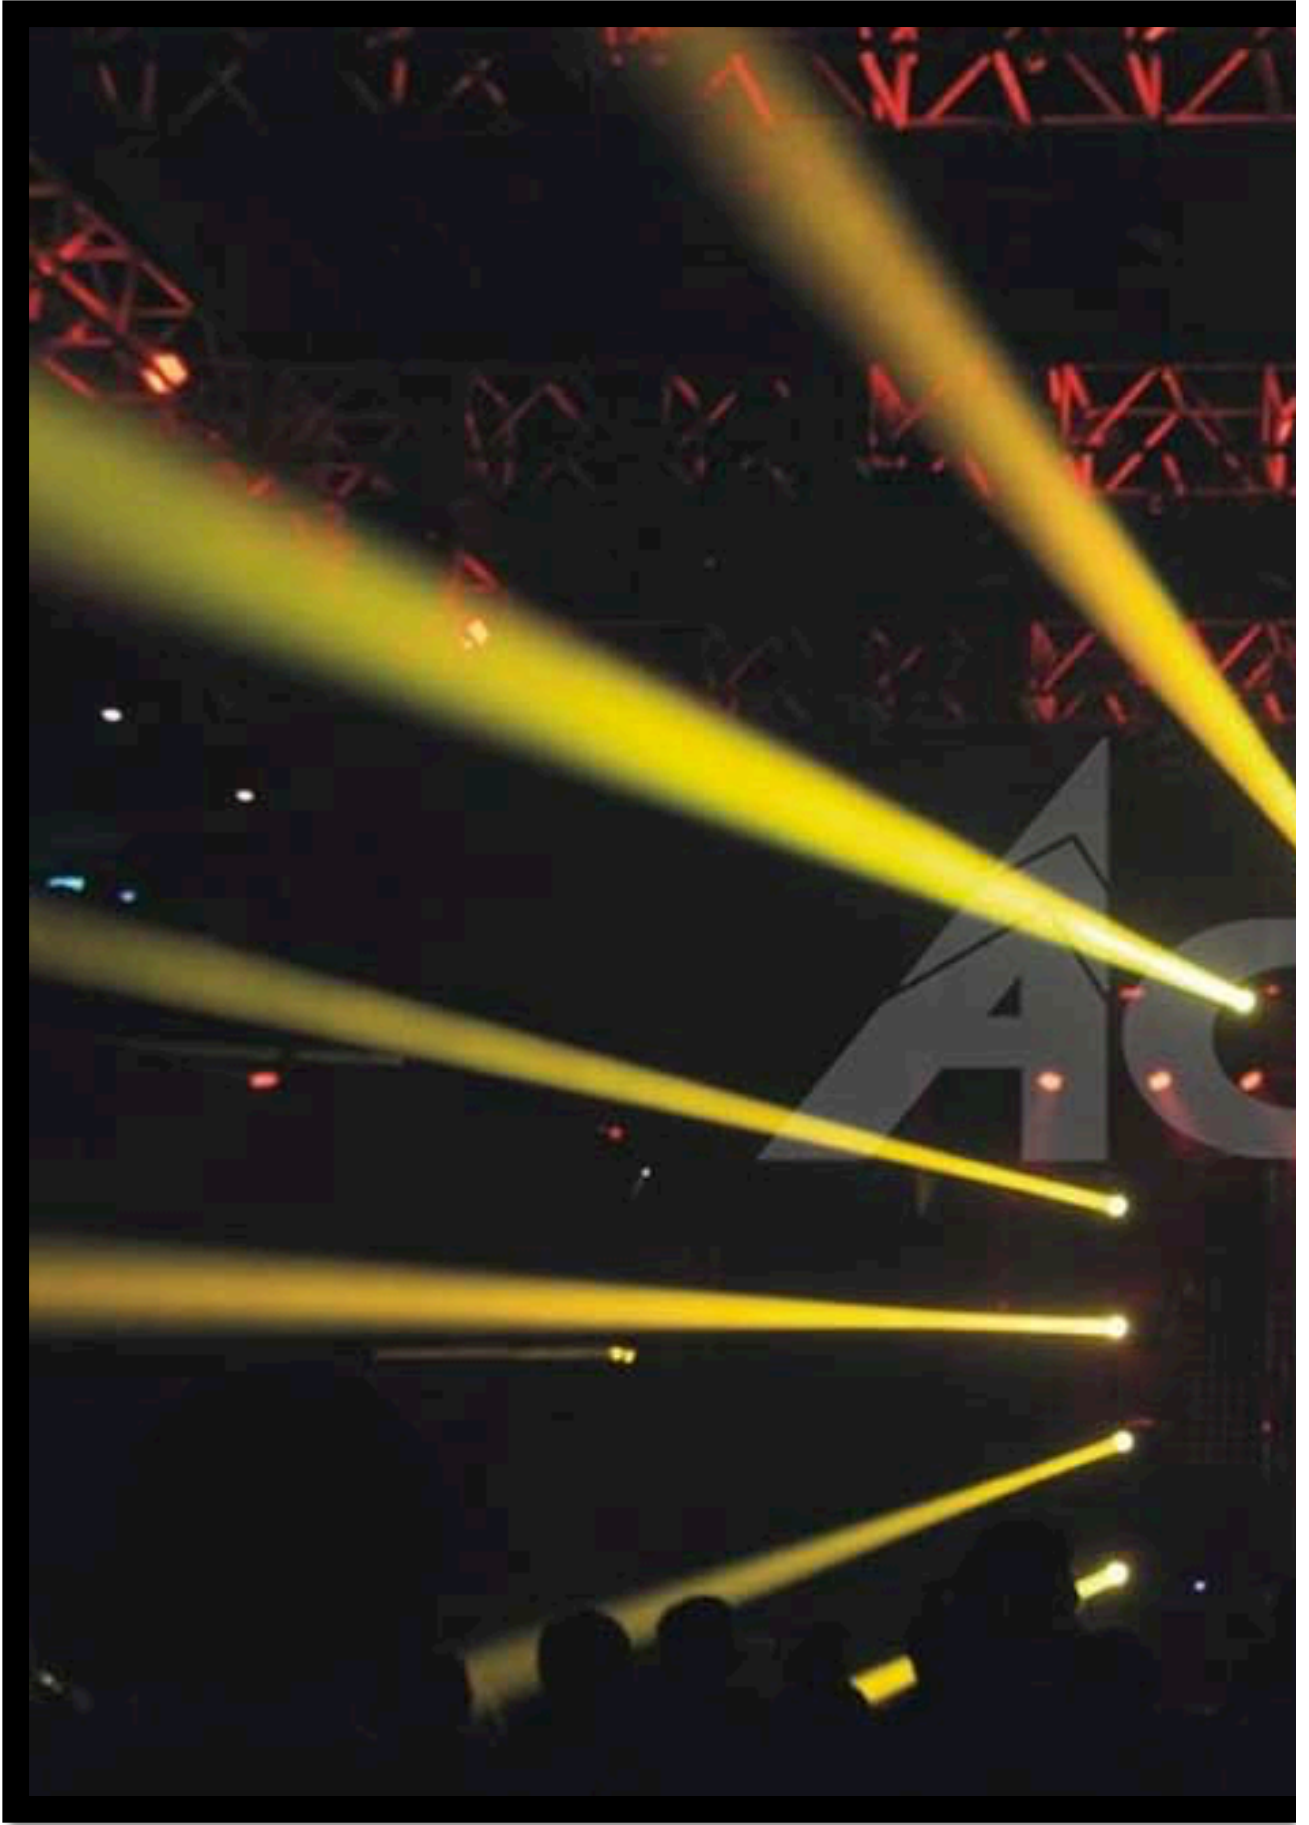







*Act with me!*

[Join us](#) | [Sitemap](#) | [Law states](#)

## Social media

[关闭窗口](#)

## XP-16R BEAM

### FEATURE

#### Specifications

Light Source:16R bulb

Beam Angle:1。

Color Temperature:8000K

#### Control

DMX Channel:19/21 Channel

Control Modes:DMX, Wireless control(Optional)

Firmware Upgrade:Update via DMX link

#### Pan/Tilt

Pan/Tilt: 540。 /270。

Pan/Tilt Resolution: 16bit

Fixation: Pan/Tilt lock

### **Construction**

Display:LCD display

Battery back-up for DMX addressing and other functions setting

Date In/Out socket:3-pin & 5-pin XLR sockets

Protection Rating:IP20

### **Features**

Motorized Focus

Color wheel:12 fixed colors plus white with rainbow effect

Gobo wheel:1 Rotating gobo wheel with 12 gobos plus open

Gobos outside diameter:9.8mm

Gobos image diameter:7mm

Smooth 0~100% dimming

Three sets of prisms- 2 x 8 facet prisms,1 x 6 facet linear prism

rotating in both directions

Variable shutter speed

SPEC.

**Electrical and Physical**

Dimension:435 x 344 x 524mm

Weight:22.2Kgs

Power Consumption:503W

Power Voltage:AC 100~240V, 50/60Hz