



XLED 336 Beam

PR-8110

The XLED 336 is a remarkably small, super bright, compact LED moving head, low power consumption with an amazingly bright beam. It features rapid and quiet movement, ideal for entertainment and decorative lighting design.

Key Features:

- OSRAM OSOLON 3W (12R+12G+12B)
- 90-264V AC, 50/60Hz (140W@220V)
- An light output close to 250W discharge lamp
- RGB colour mixing + linear CTO (2,700~10,000K)
- Field Angle 17°, Beam Angle 8°(without Frost Board)
- Field Angle 32°, Beam Angle 16°(with Frost Board)
- Lens Angle 8°
- 0-100% linearly adjustable dimmer
- Electronic strobe: 0-20 F.P.S
- 12 channels in Standard mode; 16 channels in Extended mode
- DMX 512, Master/slave mode, Stand-alone mode, Built-in mode
- Head Movement: Pan 540°, Tilt 270° with auto position correction. Pan and Tilt Swap and Invert Function.
- IP20; net weight: 4.2Kg

Standard Accessories:

G clamp, 1 pc 5-pin XLR connectors, 1 set

Safety cord, 1 pc Frost board, 1 pc

Optional Accessories:

Ω clamp, 1 pc

1582 Xingye Avenue, Nancun, Panyu, Guangzhou, 511442, China
+86-20-3995 2379 Fax.: +86-20-3995 2330 www.pr-lighting.com

Technical Data:**Power Supply:**

90~264VAC 50/60HZ

Power Consumption:

140W@220V

Light Source:

OSRAM OSOLON 3W LED (12R+12G+12B)

Optics System:

Lens angle: 8°

Field angle (Without Frost board) : (One-tenth-peak luminance angle) 17°

Beam angle (Without Frost board) : (Half-peak luminance angle) 8°

Field angle (With Frost board) : (One-tenth-peak luminance angle) 32°

Beam angle (With Frost board) : (Half-peak luminance angle) 16°

Color System:

RGB color mixing system

2700K~10000K linearly adjustable

Effect:

Dimmer: 0-100% linearly adjustable

Strobe: 0.3~20 F.P.S

Control and Programming:

Control: DMX512, 5 pin interface, Master/slave mode, Stand-alone mode, Self-test mode

Channels: Standard Mode: 12, Extended Mode: 16

1582 Xingye Avenue, Nancun, Panyu, Guangzhou, 511442, China
+86-20-3995 2379 Fax.: +86-20-3995 2330 www.pr-lighting.com

Head Movement:

Pan 540°, Tilt 270° speed adjustable; Pan Tilt Swap and Invert Functions

Physical Features:

Housing: Composite plastic+ die-casting aluminum, IP20

Weight: 4.2Kg

Other Functions:

Adjustable Pan & Tilt speed

Fixture usage time display


Software version display

Package Dimensions:

Carton/Flight Case: 315x285x265(mm)/ 1225x555x436(mm)


Packed Quantity: 1PC/Carton or 8PCS/Flight Case

Sizes: Length: 204mm Width: 224mm Height: 245mm (head in vertical direction)

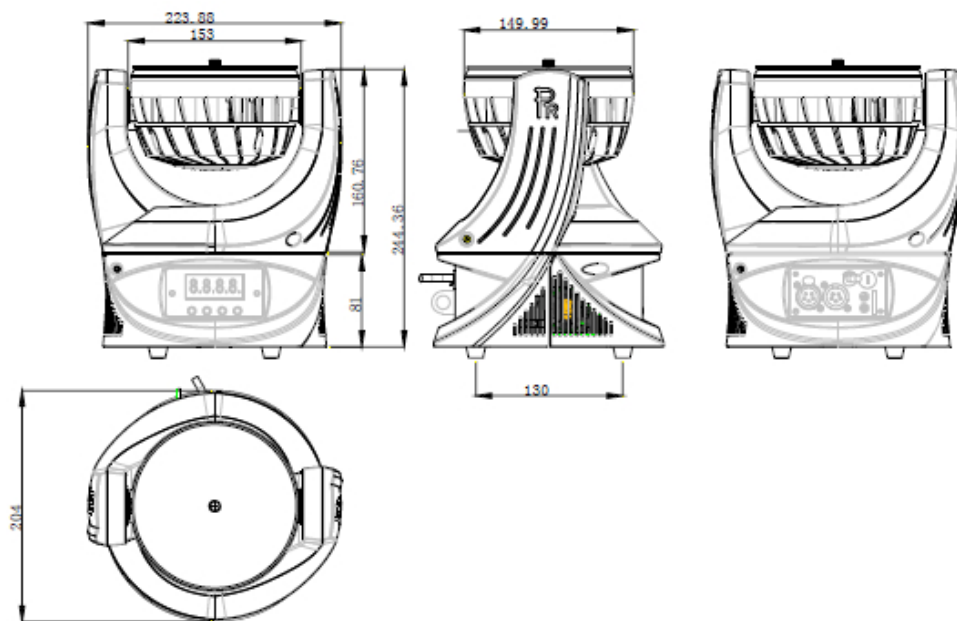


1582 Xingye Avenue, Nancun, Panyu, Guangzhou, 511442, China
+86-20-3995 2379 Fax.: +86-20-3995 2330 www.pr-lighting.com

Light Output (With frost board):

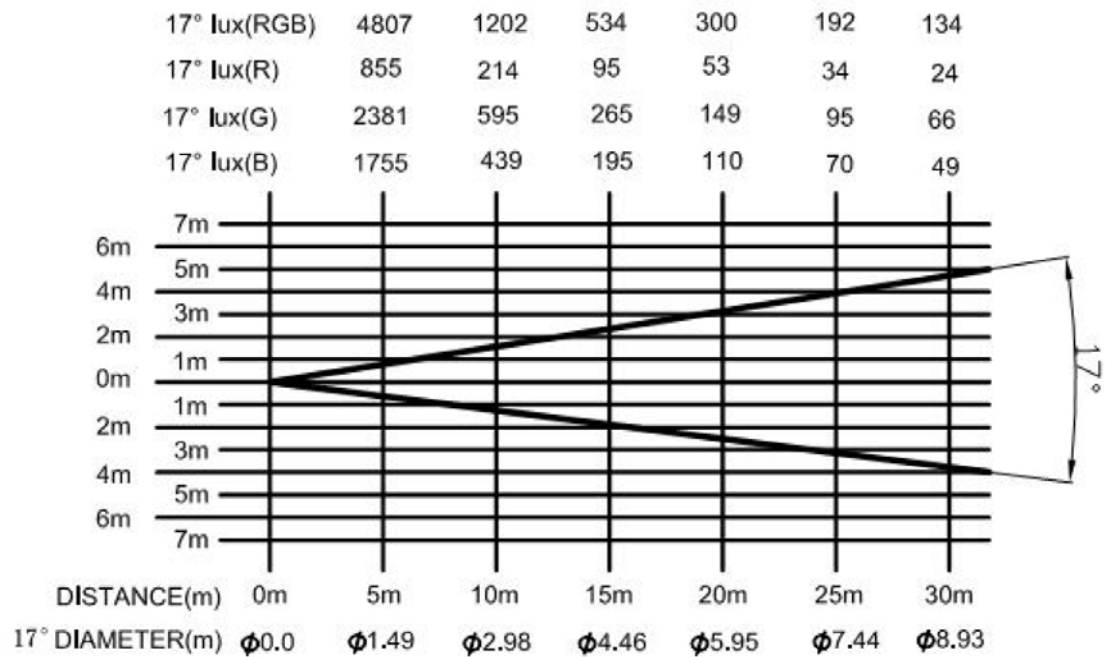

Light Output (With frost board):

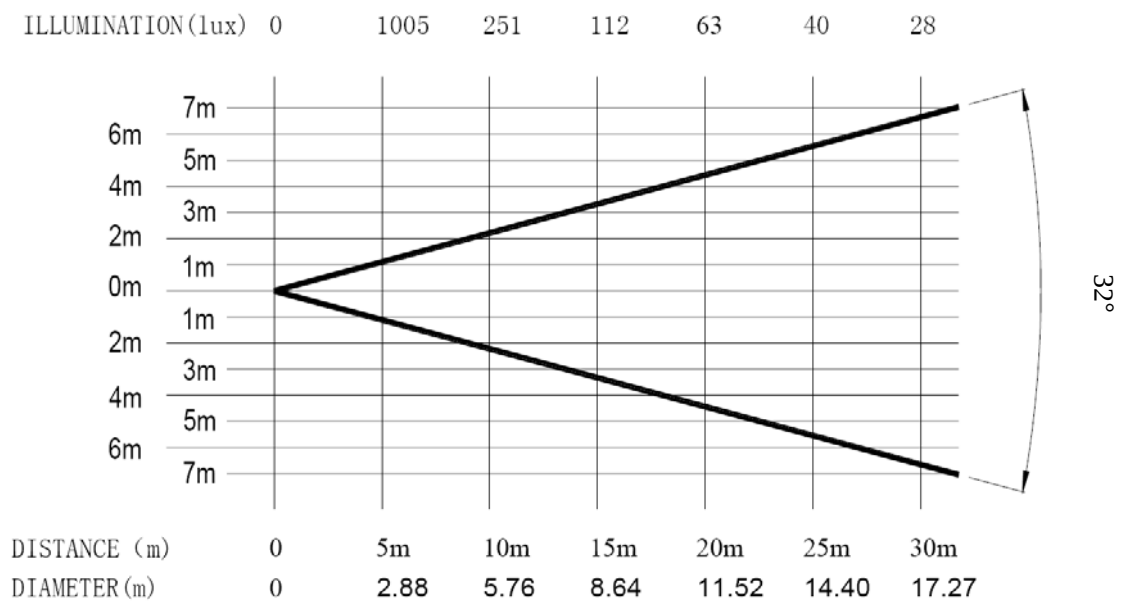

1582 Xingye Avenue, Nancun, Panyu, Guangzhou, 511442, China
+86-20-3995 2379 Fax.: +86-20-3995 2330 www.pr-lighting.com