

RAYZOR HYBRID

XA-100 BSW



Specifications

Light Source: 1 x 90W LED
 Beam Angle: 11° (on full open)
 2°/4°/6°/8°/10° (with beam reducer)
 3°/6°/9°/12°/15°/19° (with zoom lens)
 Spot Angle: Fix Gobo: 10° →15° (with zoom lens)
 Rotating Gobo: 10° →17° (with zoom lens)
 Wash Angle: 15°~28°

Control

DMX Channel: 17/20 channels
 Control Mode: DMX, Master/Slave, Sound Active
 Firmware Upgrade: Update via DMX link


Pan/Tilt

Pan/Tilt: 540° / 270°
 Pan/Tilt Resolution: 16 bit

Construction


Display: LCD display
 Data In/Out: 3-pin & 5-pin XLR
 Power in/out: Powercon
 Protection Rating: IP20

Photometrics Diagram

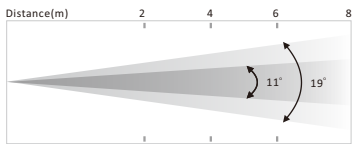

11° Lux	35300	8940	3690	2050
Diameter(m)	0.38	0.75	1.15	1.55
19° Lux	10300	3060	1150	805
Diameter(m)	0.66	1.3	2	2.6

Dimension(mm)



Electrical and Physical

Power Voltage: AC 100~240V, 50/60Hz
 Power Consumption: 184W
 Dimension: 312x255x453mm
 Weight: 12.2Kg

Features

Motorized focus
 Color Wheel: 8 fixed colors plus white with rainbow effect
 Gobo Wheel: 1 static gobo wheel with 7 gobos plus open
 1 rotating gobo wheel with 6 gobos plus open
 Gobo's outside diameter: 21mm
 Gobo's image diameter: 17mm
 3 facets prism rotating in both direction
 Outstanding color macro effect
 0~100% smooth dimming
 Independent frost effect
 Various strobe speeds
 Integrated three features: beam, spot, and wash

